




# Mini Load Retriever<sup>®</sup>

Mini Load Retrievers precisely handle and position loads up to 750 lb.


This retriever meets the needs of component, sub-assembly, kitting, and work-in-process buffering for modern factory operations.

System control software packages are available for semi-automated or fully automated warehousing distribution operations.

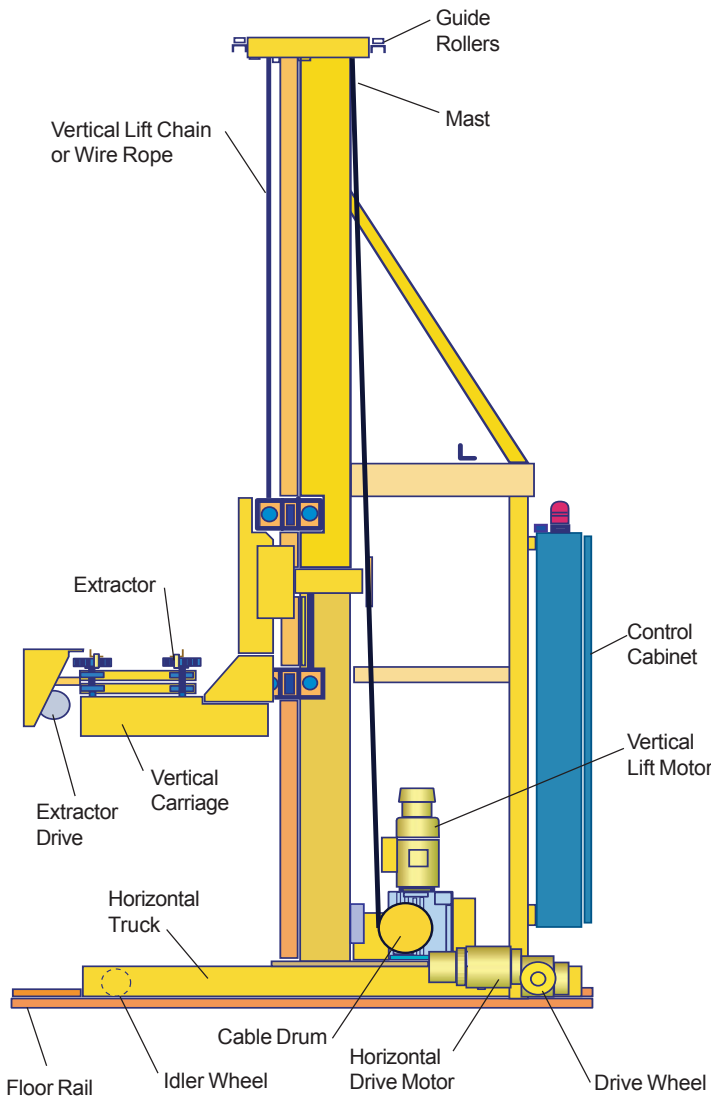

*Webb offers a full line of custom designed or standard modular design automated storage and retrieval machines.*

Retriever<sup>®</sup> is a registered trademark of Jervis B. Webb Company.

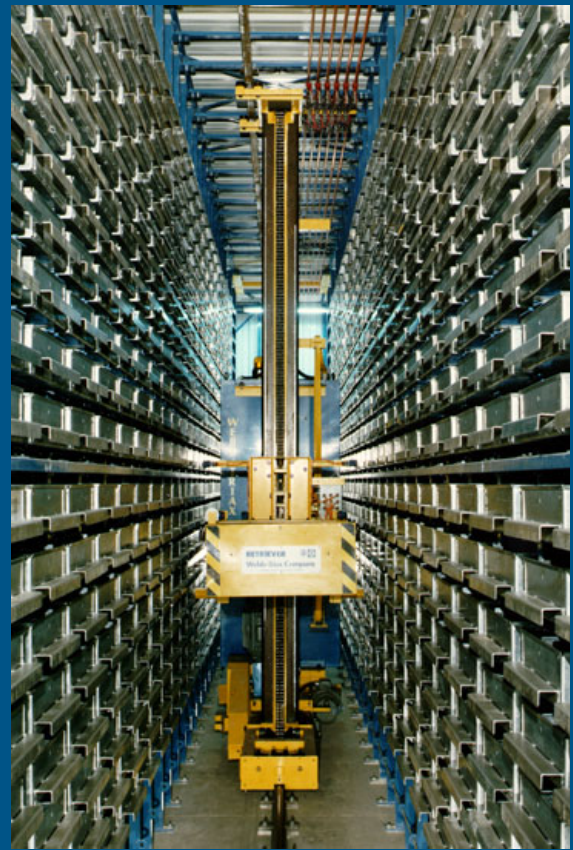

## Standard Retriever Specifications:

### Load Capacity

Max. weight ..... 750 lb  
 Typical load size ..... 24" x 48" \*

### Retriever Specifications

Max. height ..... 40 ft  
 Max. horizontal speed ..... 600 fpm  
 Max. vertical speed ..... 120 fpm  
 Max. shuttle speed ..... 150 fpm  
 Acceleration/deceleration ..... 2.0 ft sec

Vertical drive ..... variable AC motors  
 Horizontal drive ..... variable AC motors  
 Type of hoist ..... wire rope or double chain  
 Type of extractor ..... pin or shuttle  
 Power supply ..... 480V, 60HZ, 3PH  
 On board controller ..... PLC

\* Custom sizes available upon request

**Jervis B. Webb Company**  
 MATERIAL HANDLING SYSTEM SPECIALISTS



34375 West Twelve Mile Road  
 Farmington Hills, MI 48331 USA  
 1-248-553-1257 FAX: 1-248-553-1238  
 www.jervisbwebb.com